



Stainless / Full IP65 -PDT 7815

Feature:

- ◆ High Contrast color Monitor with resolution up to XGA (1024x768)
- ◆ Design for tough environment, providing great corrosion resistance.
- ◆ Full IP65 monitor provides IP65 protection with connectors and cables.
- ◆ High Shock & Vibration Resistance
- ◆ Widely Application: Automation, Medical, Tourist, Education...




Specification

Display	Viewing Size Image	15"
	Active Display Area (mm)	304.128 (H) x 228.096 (V)
	Pixel Pitch (mm)	0.297 (H) x 0.297(V)
	Resolution	1024 x 768
	Contrast Ratio	500 : 1 (typ.)
	Color	16.2M (6bit+FRC)
	Brightness	250
	Viewing Angle	-70~70 (H) ; -60~60 (V)
	Recommended Resolution	1024 x 768 @ 60Hz, 75Hz
	Signal Connector	15 pin D- Sub
Power	Source	AC 100 ~ 240V, Universal, +-10%
	Consumption	25W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch Screen	Resistive

IP65 Waterproof connectors:

VGA Input DVI Input USB Input Power Input
(Option)

Mechanical Drawing

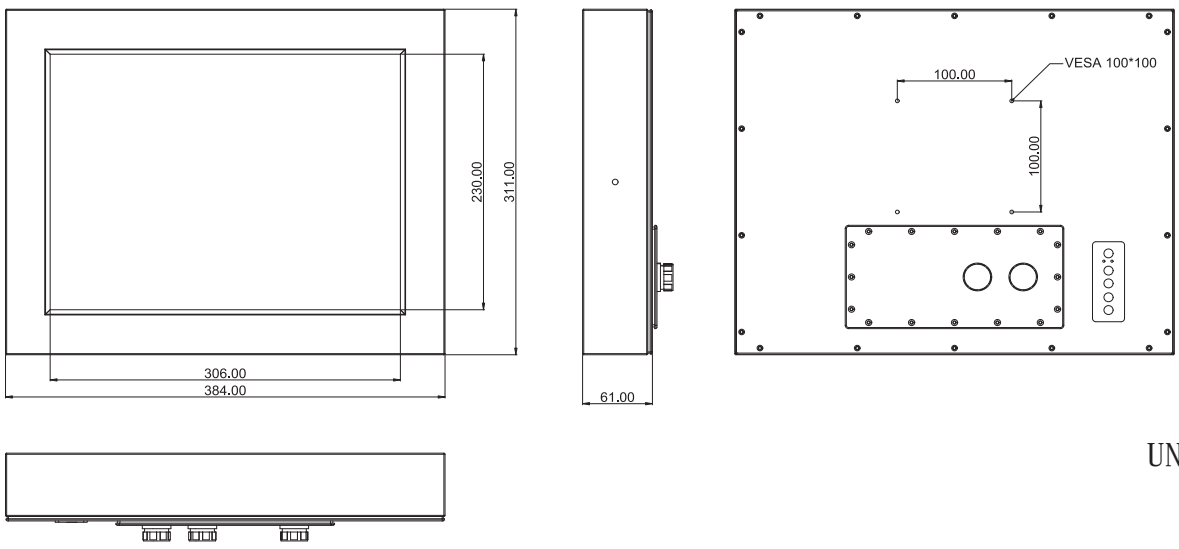

UNIT : mm