



# Stainless / Full IP65 -PDT 7819

## Feature:

- ◆ High Contrast color Monitor with resolution up to SXGA (1024x1024)
- ◆ Design for tough environment, providing great corrosion resistance.
- ◆ Full IP65 monitor provides IP65 protection with connectors and cables.
- ◆ High Shock & Vibration Resistance
- ◆ Widely Application: Automation, Medical, Tourist, Education...



## Specification

Display	Viewing Size Image	19"
	Active Display Area (mm)	376.32 (H) x 301.06 (V)
	Pixel Pitch (mm)	0.294 (H) x 0.294(V)
	Resolution	1280 x 1024
	Contrast Ratio	1000 : 1 (typ.)
	Color	16.7M (8bits+FRC)
	Brightness	400
	Viewing Angle	-85~85 (H) ; -80~80 (V)
	Recommended Resolution	1280 x 1024 @ 60Hz, 75Hz
	Signal Connector	15 pin D- Sub
Power	Source	AC 100 ~ 240V, Universal, +-10%
	Consumption	41W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch Screen	Resistive


### IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input

(Option)

## Mechanical Drawing

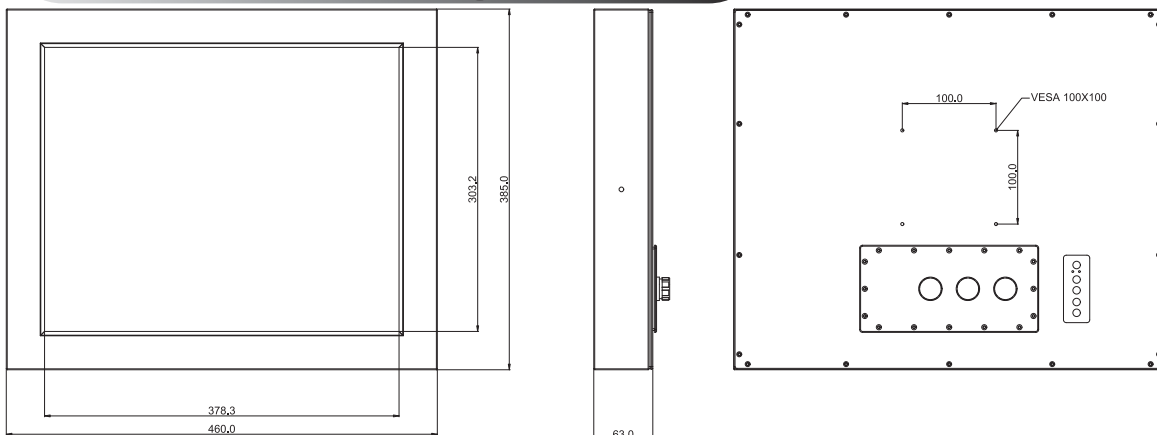

UNIT : mm