



Stainless / Full IP65 -PDT 7820

Feature:

- ◆ High Contrast color Monitor with resolution up to UXGA (1600x1200)
- ◆ Design for tough environment, providing great corrosion resistance.
- ◆ Full IP65 monitor provides IP65 protection with connectors and cables.
- ◆ High Shock & Vibration Resistance
- ◆ Widely Application: Automation, Medical, Tourist, Education...



Specification


Display	Viewing Size Image	20.1"
	Active Display Area (mm)	408.0 (H) x 306.0 (V)
	Pixel Pitch (mm)	0.255 (H) x 0.255(V)
	Resolution	1600 x 1200
	Contrast Ratio	800 : 1 (typ.)
	Color	16.7M(8bits/color)
	Brightness	300
	Viewing Angle	-89~89 (H) ; -89~89 (V)
	Recommended Resolution	1600 x 1200 @ 60Hz, 75Hz
	Signal Connector	15 pin D- Sub
Power	Source	AC 100 ~ 240V, Universal, +-10%
	Consumption	41 W typical, normal operation
	Management	VESA DPMS Compliant
Optional	Touch Screen	Resistive

IP65 Waterproof connectors:



VGA Input DVI Input USB Input Power Input
(Option)

Mechanical Drawing

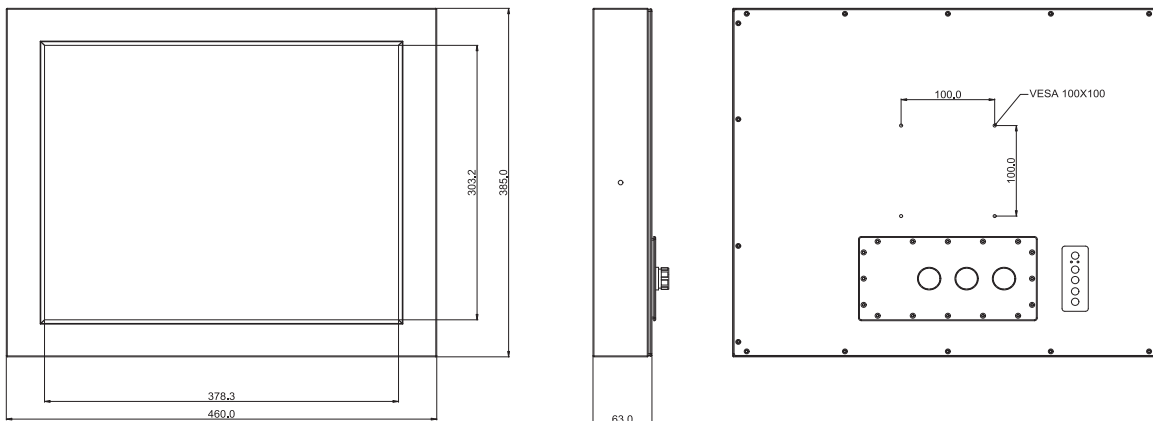

UNIT : mm